Cornell STX Series Motor Driven Units

Vertical Frame – V Belt Driven

info@cornellpumpseurope.com

Pump and motor are mounted on a hot dip galvanized base frame, equipped with lifting points and steel guard. By using v-belts and sheaves the pump speed (rpm.) is independent of the motor speed.

3STX – 15 kW motor – frame total net weight 600 kg

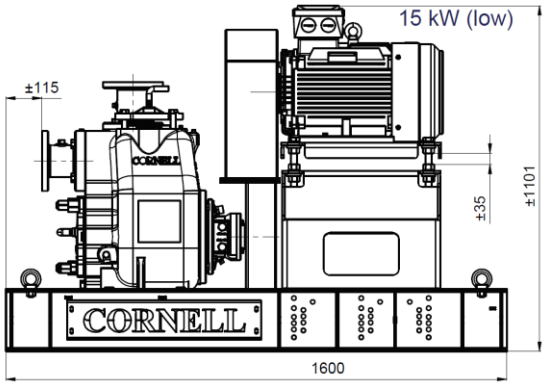

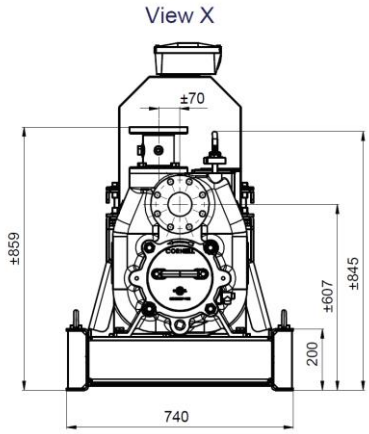

4STX – 22 kW motor – frame total net weight 750 kg

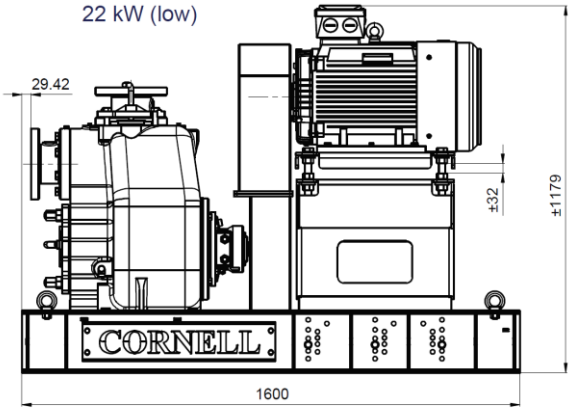

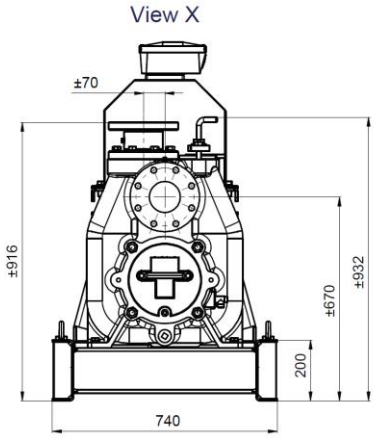
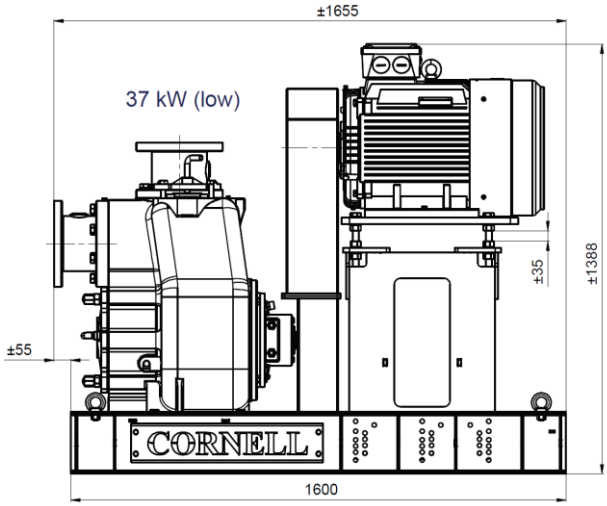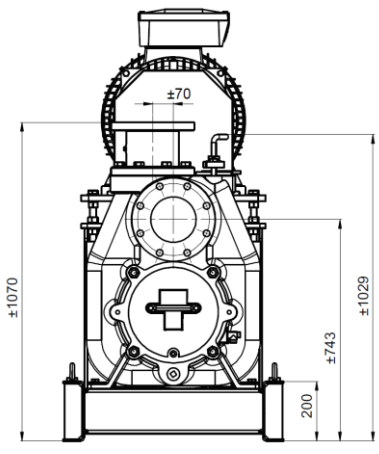
6STX – 37 kW motor – frame total net weight 975 kg